



CTRC-15-M


Cod. 03109000

EAN 8422248096638



7.5
bar

A

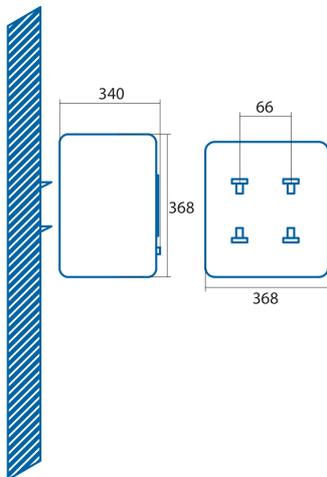

INFORMACIÓN GENERAL

EAN/UPC	8422248096638
Subfamily	Electric

Product fiche according to EU Regulation nº 812/2012

Declared Load Profile	XXS
Water Heating Energy Class	A
Water Heating Energy Efficiency (%)	35
Annual electricity consumption (kWh/year)	522
Thermostat temperature settings	75

Features

Capacity (L)	15
Number of persons	1-2
Installation	Vertical
Minimum set temperature	30
Maximum set temperature	75
Type of heating element	Enamel
Heating time 15°C-65°C (min)	66,6
Static losses 65°C (kWh/24h)	2,67
Coating thickness (mm)	5

Controls

Type of control	Mechanical
Control position	Front
Electrical connection indicator	-
Temperature indicator	-
Heating indicator	-

Safety

Overheating protection	√
Safety temperature (°C)	101
Freezing protection	-
Water protection index	IPX4
Maximum Working Pressure (Mpa)	0,75
Magnesium Anode Dimensions (mm)	D18x110

Power connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50/60
Rated power input (W)	1500
Protection against electric shock	Class I
Power cord length (m)	1,5
Plug type	Type F

Installation

Width (mm)	368
Height (mm)	368
Depth (mm)	340