




# S PRO 9000 X

Cod. 02075410

EAN 8422248371421

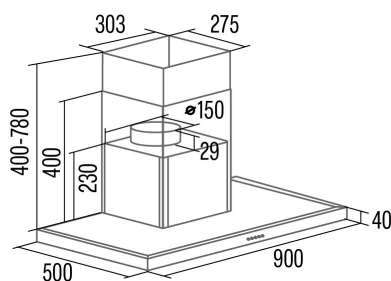

## GENERAL INFORMATION

EAN/UPC	8422248371421
Subfamily	Box

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	59,8
EEl class (energy efficiency class)	A
FDE (fluid dynamic efficiency)	29,3
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (Lux/W)	35
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	76,3
GFE class (grease filtering efficiency class)	C
Airflow in normal mode MIN (m3/h)	419
Airflow in normal mode MAX (m3/h)	628,2
Airflow in boost mode MIN (m3/h)	1027
Acoustic power in normal mode MIN (dB)	64
Acoustic power in normal mode MAX (dB)	73
Acoustic power boost mode (dB)	76
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0,48

### Integration directive EU 66/2014

<i>f</i> (time increase factor)	0,9
EEl (Energy Efficiency Index)	53,1
QBEP (maximum efficiency at air flow point) (m3/h)	438,2
PBEP (maximum efficiency at pressure point) (Pa)	416
WBEP (power consumption at maximum efficiency) (W)	172,8
WL (nominal power lighting system) (W)	4,2
EMIDDLE (Average illuminance on the cooking surface) (lux)	147,6

### External Dimensions

Width (mm)	900
Depth (mm)	500
Maximum total height (mm)	820
Minimum total height (mm)	440
Diamètre de sortie (mm)	150

### Characteristics

Motor quantity	1
Motor model	A1000
Maximum pressure (Pa)	486,76
Filter technology	Aluminium mesh
Control technology	PANEL ELECTRONICO
Booster	√
Power levels	3
Timer	√
Filter saturation indicator	√
Connectivity	No

### Lighting

Light model	ECOLED
-------------	--------

### Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650
Back draught shutter	Included

### Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50

Nominal input power (W)	383
Electric shock protection	Class I
Power cord length (m)	1,2
Plug type	Type F

---

**Accessories**

Back draught shutter	02800706
Activated charcoal filter	02800959

---