
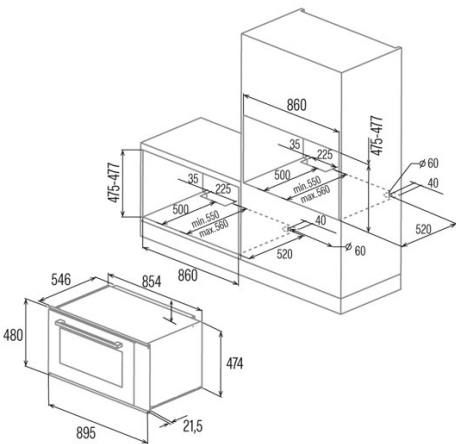


CMD 9208 BK

Cod. 07039305

EAN 8422248093156

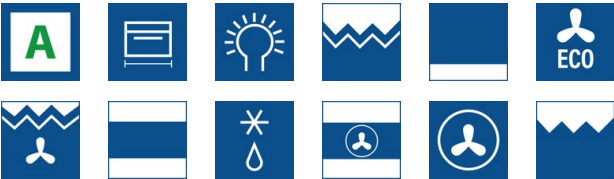

GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248093156 |
| Subfamily | Multifunction |

Product sheet

|                                                     |             |
|-----------------------------------------------------|-------------|
| Energy Efficiency Index (EEI)                       | 94          |
| Energy efficiency class                             | A           |
| Energy consumption in conventional mode (kWh/cycle) | 1,15        |
| Energy consumption in fan mode (kWh/cycle)          | 0,9         |
| Heat source                                         | Electricity |
| Appliance mass [Kg]                                 | 47,4        |
| Number of cavities                                  | 1           |
| Cavity volume (L)                                   | 93          |

Dimensions

|                      |     |
|----------------------|-----|
| Width (mm)           | 895 |
| Height (mm)          | 480 |
| Depth (mm)           | 546 |
| Built-in width (mm)  | 860 |
| Built-in height (mm) | 475 |
| Built-in depth (mm)  | 550 |

Controls

|                          |                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Control type             | Touch control                                                                                                                |
| Display                  | LCD                                                                                                                          |
| Number of functions      | 10                                                                                                                           |
| Functions                | Double_grill_with_fan;Defrosting;Grill;Double_grill;Turbo heating;Eco;Light;3D cooking;Top and bottom heating;Bottom heating |
| Timer                    | Electronic                                                                                                                   |
| On/off indicator         | √                                                                                                                            |
| Thermostat indicator     | √                                                                                                                            |
| Minimum temperature [°C] | 50                                                                                                                           |
| Maximum temperature [°C] | 250                                                                                                                          |
| Thermal probe            | -                                                                                                                            |

Characteristics

|                        |       |
|------------------------|-------|
| Cleaning               | No    |
| Enamel                 | Black |
| Drop down grill        | -     |
| Removable inner glass  | √     |
| Number of light bulbs  | 50    |
| Bulb power [W]         | 2     |
| Number of door glasses | 3     |
| Manual door lock       | -     |
| Soft close             | -     |
| Cavity type            | Flat  |
| Side racks             | √     |
| Levels                 | 5     |
| Telescopic guides      | No    |
| Convection fan         | √     |

Safety

|                           |   |
|---------------------------|---|
| Cooling fan               | √ |
| Overheating protection    | √ |
| Automatic safety shutdown | √ |
| Pyrolysis door lock       | - |
| Pyrolysis lock indicator  | - |

Electrical connection

|                                        |      |
|----------------------------------------|------|
| Power of the upper heating element [W] | 900  |
| Lower power of the heating element [W] | 1500 |
| Turbocharger power [W]                 | 2500 |

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50/60   |
| Nominal input power (W)   | 2800    |
| Electric shock protection | Class I |
| Power cord length (m)     | 1       |
| Plug type                 | No plug |

**Accessories**

|                   |   |
|-------------------|---|
| Flat tray         | - |
| Deep tray         | √ |
| Steam tray        | - |
| Grill             | √ |
| Inner grill       | - |
| Telescopic guides | - |
| Tray handle       | - |
| Removable tank    | - |
| Pizza stone       | - |
| Roast kit         | - |