


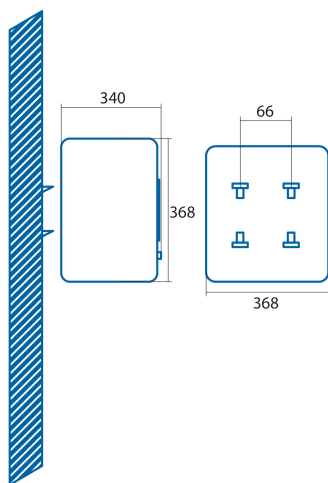

CTRC-15-M

Cod. 03109000

EAN 8422248096638

7.5
bar

GENERAL INFORMATION

EAN/UPC	8422248096638
Subfamily	Electric

Product fiche according to EU Regulation No 812/2012

Declared load profile	XXS
Water heating energy class	A
Water heating energy efficiency (%)	35
Annual electricity consumption (kWh/year)	522
Thermostat temperature settings	75

Features

Capacity (L)	15
Number of people	1-2
Instalación	Vertical
Minimum fixed temperature	30
Maximum settings temperature	75
Type of heating element	Enamel
Heating time 15°C-65°C (min)	66,6
Static losses at 65°C (kWh/24h)	2,67
Coating thickness (mm)	5

Controls

Control type	Mechanical
Control position	Front
Electrical connection indicator	-
Temperature indicator	-
Heating indicator	-

Safety

Overheating protection	√
Safety temperature (°C)	101
Freezing protection	-
Water protection index	IPX4
Maximum working pressure (Mpa)	0,75
Magnesium anode dimensions (mm)	D18x110

Power connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	1500
Electric shock protection	Class I
Power cord length (m)	1,5
Plug type	Type F

Installation

Width (mm)	368
Height (mm)	368
Depth (mm)	340