




## BETA PRO 7000 BK

Cod. 02075420

EAN 8422248371551

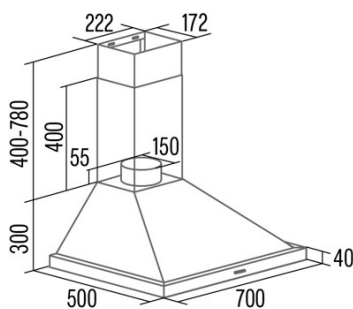

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371551 |
| Subfamily | Chimney       |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |      |
|-----------------------------------------------|------|
| AEC (Annual energy consumption) (kWh/year)    | 64,1 |
| EEI class (energy efficiency class)           | A    |
| FDE (fluid dynamic efficiency)                | 29,2 |
| FDE class (fluid dynamic efficiency class)    | A    |
| LE (light efficiency) (lux/W)                 | 34   |
| LE class (light efficiency class)             | A    |
| GFE (grease filtering efficiency)             | 75,5 |
| GFE class (grease filtering efficiency class) | C    |
| Airflow in normal mode MIN (m3/h)             | 407  |
| Airflow in normal mode MAX (m3/h)             | 564  |
| Airflow in boost mode MIN (m3/h)              | 971  |
| Acoustic power in normal mode MIN (dB)        | 65   |
| Acoustic power in normal mode MAX (dB)        | 72   |
| Acoustic power boost mode (dB)                | 75   |
| Po (energy consumption in off mode) (W)       | 0    |
| Ps (energy consumption in standby mode) (W)   | 0,48 |

### Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 0,9   |
| EEI (Energy Efficiency Index)                              | 53,5  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 441,8 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 443   |
| WBEP (power consumption at maximum efficiency) (W)         | 186,1 |
| WL (nominal power lighting system) (W)                     | 4,1   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 139,5 |

### External Dimensions

|                           |      |
|---------------------------|------|
| Width (mm)                | 700  |
| Depth (mm)                | 500  |
| Maximum total height (mm) | 1080 |
| Minimum total height (mm) | 700  |
| Diamètre de sortie (mm)   | 150  |

### Characteristics

|                       |                                      |
|-----------------------|--------------------------------------|
| Motor quantity        | 1                                    |
| Motor model           | A1000                                |
| Maximum pressure (Pa) | 501,17                               |
| Filter technology     | Aluminium mesh                       |
| Control technology    | PANEL ELECTRONICO<br>DISPLAY DIGITAL |
| Booster               | √                                    |
| Power levels          | 3                                    |
| Timer                 | √                                    |

### Lighting

|                |        |
|----------------|--------|
| Light model    | ECOLED |
| Ray technology | LED    |

### Installation

|                                         |          |
|-----------------------------------------|----------|
| Minimum distance to electric plate (mm) | 550      |
| Minimum distance to gas plate (mm)      | 650      |
| Charcoal filter                         | -        |
| Back draught shutter                    | Included |

### Electric connection

|                     |         |
|---------------------|---------|
| Nominal voltage (V) | 220-240 |
|---------------------|---------|

|                           |         |
|---------------------------|---------|
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 383     |
| Electric shock protection | Class I |
| Power cord length (m)     | 1,2     |
| Plug type                 | Type F  |

**Accessories**

|                           |          |
|---------------------------|----------|
| Back draught shutter      | 02800706 |
| Activated charcoal filter | 02800959 |