




# LFK 6000 X

Cod. 02011602

EAN 8422248357180

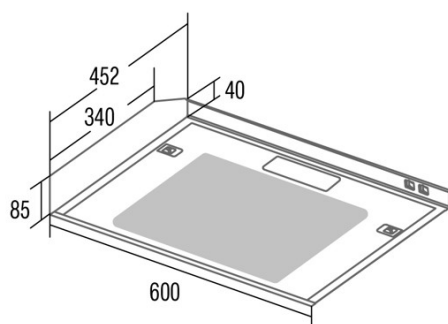

## GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248357180 |
| Subfamily | Conventional  |

## Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |      |
|-----------------------------------------------|------|
| AEC (Annual energy consumption) (kWh/year)    | 29,6 |
| EEl class (energy efficiency class)           | B    |
| FDE (fluid dynamic efficiency)                | 11,5 |
| FDE class (fluid dynamic efficiency class)    | E    |
| LE (light efficiency) (lux/W)                 | 15,5 |
| LE class (light efficiency class)             | D    |
| GFE (grease filtering efficiency)             | 67,7 |
| GFE class (grease filtering efficiency class) | D    |
| Airflow in normal mode MIN (m3/h)             | 108  |
| Airflow in normal mode MAX (m3/h)             | 162  |
| Acoustic power in normal mode MIN (dB)        | 49   |
| Acoustic power in normal mode MAX (dB)        | 58   |
| Po (energy consumption in off mode) (W)       | 0    |
| Ps (energy consumption in standby mode) (W)   | 0    |

## Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 1,6   |
| EEl (Energy Efficiency Index)                              | 69,2  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 91,5  |
| PBEP (maximum efficiency at pressure point) (Pa)           | 211,9 |
| WBEP (power consumption at maximum efficiency) (W)         | 47    |
| WL (nominal power lighting system) (W)                     | 3     |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 46,5  |

## External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 600 |
| Depth (mm)                | 425 |
| Maximum total height (mm) | 85  |
| Minimum total height (mm) | 85  |
| Diamètre de sortie (mm)   | 120 |

## Characteristics

|                                       |                          |
|---------------------------------------|--------------------------|
| Motor quantity                        | 1                        |
| Motor model                           | L1B                      |
| Maximum pressure (Pa)                 | 318                      |
| Filter technology                     | Achrylic                 |
| Control technology                    | Mechanical rocker switch |
| Booster                               | -                        |
| Power levels                          | 3                        |
| Timer                                 | -                        |
| Filter saturation indicator           | -                        |
| Charcoal filter replacement indicator | -                        |
| Dimmer function                       | -                        |
| Connectivity                          | -                        |
| Remote control                        | -                        |
| Display                               | -                        |

## Lighting

|                |          |
|----------------|----------|
| Light model    | LED E-14 |
| Ray technology | LED      |

## Installation

|                                         |     |
|-----------------------------------------|-----|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm)      | 650 |
| Recirculation option                    | √   |
| Charcoal filter                         | -   |

|                      |   |
|----------------------|---|
| Back draught shutter | - |
| Inner shield         | - |

**Electric connection**

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 65,5    |
| Electric shock protection | Class I |
| Plug type                 | No plug |

**Accessories**

|                                 |           |
|---------------------------------|-----------|
| Upper decorative duct extension | No        |
| White decorative duct           | No        |
| Black decorative duct           | No        |
| Island tube booster             | No        |
| Back draught shutter            | '02849002 |
| Activated charcoal filter       | '02846764 |