
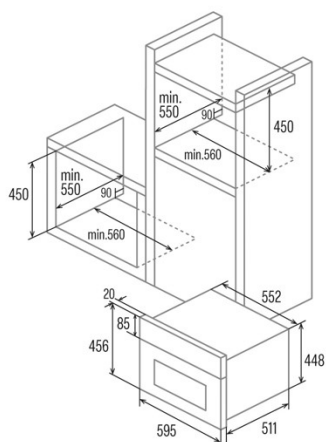


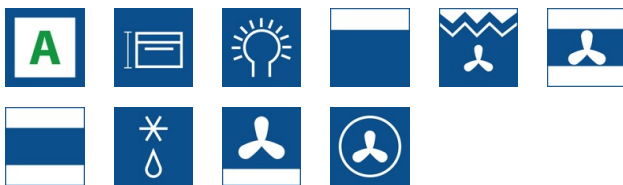

## CMD 5008 X

Cod. **07003307**EAN **8422248067881**

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248067881 |
| Subfamily | Compact       |

### Product sheet

|                                                     |             |
|-----------------------------------------------------|-------------|
| Energy Efficiency Index (EEI)                       | 97,2        |
| Energy efficiency class                             | A           |
| Energy consumption in conventional mode (kWh/cycle) | 0,7         |
| Energy consumption in fan mode (kWh/cycle)          | 0,71        |
| Heat source                                         | Electricity |
| Appliance mass [Kg]                                 | 30,4        |
| Number of cavities                                  | 1           |
| Cavity volume (L)                                   | 40          |

### Dimensions

|                      |     |
|----------------------|-----|
| Width (mm)           | 456 |
| Height (mm)          | 595 |
| Depth (mm)           | 502 |
| Built-in width (mm)  | 560 |
| Built-in height (mm) | 450 |
| Built-in depth (mm)  | 550 |

### Controls

|                          |                                                                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Control type             | Touch control                                                                                                                                   |
| Display                  | LCD                                                                                                                                             |
| Number of functions      | 8                                                                                                                                               |
| Functions                | Top_and_bottom_heating_with_fan;Turbo heating;Bottom heating with fan;Double grill with fan;Defrosting;Top and bottom heating;Top heating;Light |
| Timer                    | Electronic                                                                                                                                      |
| On/off indicator         | √                                                                                                                                               |
| Thermostat indicator     | √                                                                                                                                               |
| Minimum temperature [°C] | 50                                                                                                                                              |
| Maximum temperature [°C] | 250                                                                                                                                             |
| Thermal probe            | -                                                                                                                                               |

### Characteristics

|                        |                  |
|------------------------|------------------|
| Cleaning               | Aquasmart Manual |
| Enamel                 | Black            |
| Drop down grill        | -                |
| Removable inner glass  | -                |
| Number of light bulbs  | 25               |
| Bulb power [W]         | 1                |
| Number of door glasses | 3                |
| Manual door lock       | -                |
| Soft close             | -                |
| Cavity type            | Flat             |
| Side racks             | √                |
| Levels                 | 4                |
| Telescopic guides      | 0,75             |
| Convection fan         | √                |

### Safety

|                           |   |
|---------------------------|---|
| Cooling fan               | √ |
| Overheating protection    | √ |
| Automatic safety shutdown | √ |
| Pyrolysis door lock       | - |
| Pyrolysis lock indicator  | - |

### Electrical connection

|                                        |      |
|----------------------------------------|------|
| Power of the upper heating element [W] | 900  |
| Lower power of the heating element [W] | 1300 |

|                           |         |
|---------------------------|---------|
| Turbocharger power [W]    | 2300    |
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50/60   |
| Nominal input power (W)   | 2380    |
| Electric shock protection | Class I |
| Power cord length (m)     | 1       |
| Plug type                 | No plug |

**Accessories**

|                   |   |
|-------------------|---|
| Flat tray         | - |
| Deep tray         | √ |
| Steam tray        | - |
| Grill             | √ |
| Inner grill       | - |
| Telescopic guides | √ |
| Tray handle       | - |
| Removable tank    | - |
| Pizza stone       | - |
| Roast kit         | - |