




## LENA 900 XGBK

Cod. 02059403

EAN 8422248108089

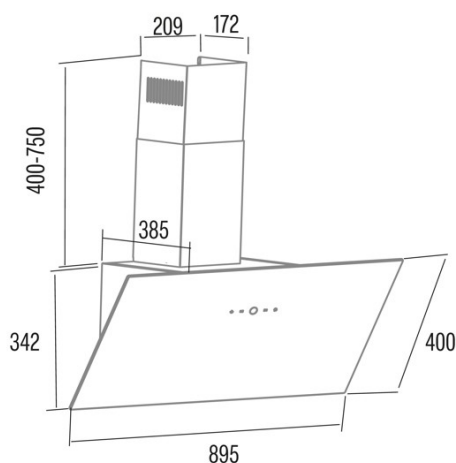

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248108089 |
| Subfamily | Angle Glass   |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |      |
|-----------------------------------------------|------|
| AEC (Annual energy consumption) (kWh/year)    | 48,3 |
| EEl class (energy efficiency class)           | B    |
| FDE (fluid dynamic efficiency)                | 19,6 |
| FDE class (fluid dynamic efficiency class)    | C    |
| LE (light efficiency) (lux/W)                 | 21   |
| LE class (light efficiency class)             | B    |
| GFE (grease filtering efficiency)             | 66,3 |
| GFE class (grease filtering efficiency class) | D    |
| Airflow in normal mode MIN (m3/h)             | 2851 |
| Airflow in normal mode MAX (m3/h)             | 4548 |
| Acoustic power in normal mode MIN (dB)        | 48   |
| Acoustic power in normal mode MAX (dB)        | 58   |
| Po (energy consumption in off mode) (W)       | 0,48 |

### Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 1,3   |
| EEl (Energy Efficiency Index)                              | 68,9  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 245,1 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 276   |
| WBEP (power consumption at maximum efficiency) (W)         | 95,7  |
| WL (nominal power lighting system) (W)                     | 3,9   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 81    |

### Characteristics

|                                       |                          |
|---------------------------------------|--------------------------|
| Motor quantity                        | 1                        |
| Filter technology                     | Aluminium mesh           |
| Control technology                    | Electronic Touch Control |
| Power levels                          | 3                        |
| Timer                                 | √                        |
| Filter saturation indicator           | -                        |
| Charcoal filter replacement indicator | -                        |
| Dimmer function                       | √                        |
| Connectivity                          | No                       |
| Remote control                        | -                        |
| Display                               | Display                  |

### Lighting

|                |        |
|----------------|--------|
| Light model    | ECOLED |
| Ray technology | LED    |

### Electric connection

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 60      |
| Nominal input power (W)   | 120     |
| Electric shock protection | Class I |
| Plug type                 | Type F  |

### Accessories

|                           |                                                    |
|---------------------------|----------------------------------------------------|
| Back draught shutter      | B30-TG18-015-JB (2pcs included)                    |
| Activated charcoal filter | Big Round carbon filter B15-TF08-097-JB (optional) |

