




## SILENTIS 10 INOX

Cod. 01070300

EAN 8422248016957

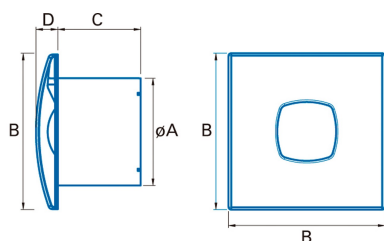

|             | Ø A | B   | C   | D  |
|-------------|-----|-----|-----|----|
| SILENTIS 10 | 98  | 140 | 80  | 22 |
| SILENTIS 12 | 118 | 170 | 95  | 30 |
| SILENTIS 15 | 148 | 190 | 112 | 32 |

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248016957 |
| Subfamily | Axial         |

### General features

|                                        |                |
|----------------------------------------|----------------|
| Motor type                             | AC/SHADED POLE |
| Motor model                            | SP5812         |
| Motor power (W)                        | 15             |
| Lighting technology                    | LED            |
| Light quantity                         | 1              |
| Filter type                            | N/A            |
| Number of layers                       | N/A            |
| Control description                    | N/A            |
| Power levels                           | 1              |
| Timer                                  | -              |
| Hygro timer                            | -              |
| Electronic filter saturation indicator | -              |
| Dimmable lighting                      | -              |

### Installation

|                           |     |
|---------------------------|-----|
| Width (mm)                | 140 |
| Height (mm)               | 140 |
| Depth (mm)                | 102 |
| Total minimum height (mm) | 140 |
| Outlet diameter (mm)      | 98  |

### Power connection

|                           |          |
|---------------------------|----------|
| Nominal voltage (V)       | 220-240  |
| Nominal frequency (Hz)    | 50/60    |
| Nominal input power (W)   | 15       |
| Electric shock protection | Class II |
| Plug type                 | No plug  |

### Accessories

|                  |                                    |
|------------------|------------------------------------|
| Backdraught seal | Backdraught shutters incorporated. |
|------------------|------------------------------------|

### Power and water connection

|                           |          |
|---------------------------|----------|
| Nominal voltage (V)       | 220-240  |
| Nominal frequency (Hz)    | 50/60    |
| Nominal input power (W)   | 15       |
| Electric shock protection | Class II |
| Plug type                 | No plug  |