




## GS-600 BK

Cod. 00116400

EAN 8422248357371

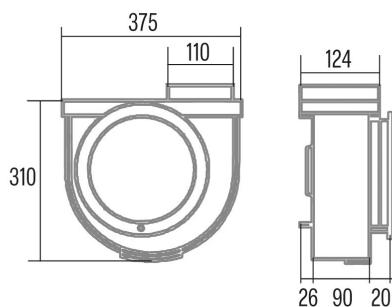

### GENERAL INFORMATION

|           |                   |
|-----------|-------------------|
| EAN/UPC   | 8422248357371     |
| Subfamily | Kitchen Extractor |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                             |     |
|---------------------------------------------|-----|
| AEC (Annual energy consumption) (kWh/year)  | 517 |
| EEl class (energy efficiency class)         | C   |
| FDE (fluid dynamic efficiency)              | 125 |
| FDE class (fluid dynamic efficiency class)  | E   |
| Airflow in normal mode MAX (m3/h)           | 480 |
| Acoustic power in normal mode MAX (dB)      | 50  |
| Po (energy consumption in off mode) (W)     | 0   |
| Ps (energy consumption in standby mode) (W) | 0   |

### Integration directive EU 66/2014

|                                                    |      |
|----------------------------------------------------|------|
| $f$ (time increase factor)                         | 16   |
| EEl (Energy Efficiency Index)                      | 789  |
| QBEP (maximum efficiency at air flow point) (m3/h) | 3117 |
| PBEP (maximum efficiency at pressure point) (Pa)   | 1316 |
| WBEP (power consumption at maximum efficiency) (W) | 914  |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 375 |
| Depth (mm)                | 124 |
| Maximum total height (mm) | 360 |
| Minimum total height (mm) | 310 |

### Characteristics

|                                       |            |
|---------------------------------------|------------|
| Motor quantity                        | 1          |
| Free out airflow (m3/h)               | 480        |
| Control technology                    | Commutator |
| Booster                               | -          |
| Power levels                          | 1          |
| Timer                                 | -          |
| Filter saturation indicator           | -          |
| Charcoal filter replacement indicator | -          |
| Dimmer function                       | -          |
| Connectivity                          | No         |
| Remote control                        | -          |

### Installation

|                                         |    |
|-----------------------------------------|----|
| Minimum distance to electric plate (mm) | 80 |
| Minimum distance to gas plate (mm)      | 80 |
| Recirculation option                    | -  |
| Charcoal filter                         | -  |
| Back draught shutter                    | No |

### Electric connection

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50/60   |
| Nominal input power (W)   | 105     |
| Electric shock protection | Class I |