




## S PRO 6000 BK

Cod. 02075415

EAN 8422248371506

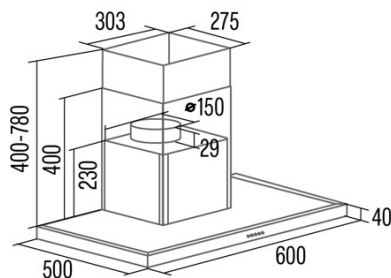

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371506 |
| Subfamily | Box           |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |       |
|-----------------------------------------------|-------|
| AEC (Annual energy consumption) (kWh/year)    | 67,8  |
| EEl class (energy efficiency class)           | A     |
| FDE (fluid dynamic efficiency)                | 29,2  |
| FDE class (fluid dynamic efficiency class)    | A     |
| LE (light efficiency) (lux/W)                 | 47    |
| LE class (light efficiency class)             | A     |
| GFE (grease filtering efficiency)             | 76,3  |
| GFE class (grease filtering efficiency class) | C     |
| Airflow in normal mode MIN (m3/h)             | 417   |
| Airflow in normal mode MAX (m3/h)             | 577,7 |
| Airflow in boost mode MIN (m3/h)              | 1001  |
| Acoustic power in normal mode MIN (dB)        | 64    |
| Acoustic power in normal mode MAX (dB)        | 72    |
| Acoustic power boost mode (dB)                | 75    |
| Po (energy consumption in off mode) (W)       | 0     |
| Ps (energy consumption in standby mode) (W)   | 0,48  |

### Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 0,9   |
| EEl (Energy Efficiency Index)                              | 53,8  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 497,7 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 417   |
| WBEP (power consumption at maximum efficiency) (W)         | 197,4 |
| WL (nominal power lighting system) (W)                     | 4,1   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 190,8 |

### Characteristics

|                       |                                      |
|-----------------------|--------------------------------------|
| Motor quantity        | 1                                    |
| Motor model           | A1000                                |
| Maximum pressure (Pa) | 473,39                               |
| Control technology    | PANEL ELECTRONICO<br>DISPLAY DIGITAL |
| Booster               | √                                    |

### Lighting

|                |        |
|----------------|--------|
| Light model    | ECOLED |
| Ray technology | LED    |

### Electric connection

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 383     |
| Electric shock protection | Class I |
| Power cord length (m)     | 1,2     |
| Plug type                 | Type F  |

### Accessories

|                      |          |
|----------------------|----------|
| Back draught shutter | 02800706 |
|----------------------|----------|