




## PROFESSIONAL-750

Cod. 00117000

EAN 8422248100816

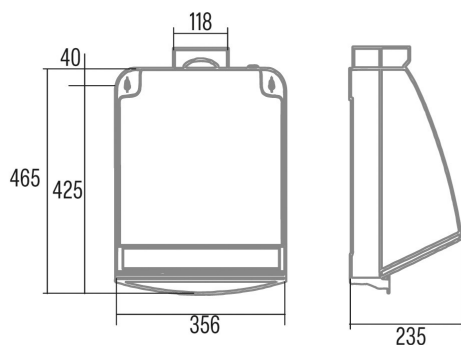

### GENERAL INFORMATION

|           |                   |
|-----------|-------------------|
| EAN/UPC   | 8422248100816     |
| Subfamily | Kitchen Extractor |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |      |
|-----------------------------------------------|------|
| AEC (Annual energy consumption) (kWh/year)    | 57   |
| EEl class (energy efficiency class)           | D    |
| FDE (fluid dynamic efficiency)                | 8,7  |
| FDE class (fluid dynamic efficiency class)    | E    |
| LE class (light efficiency class)             | N_A  |
| GFE (grease filtering efficiency)             | 53,7 |
| GFE class (grease filtering efficiency class) | F    |
| Airflow in normal mode MAX (m3/h)             | 600  |
| Acoustic power in normal mode MAX (dB)        | 49   |
| Po (energy consumption in off mode) (W)       | 0    |
| Ps (energy consumption in standby mode) (W)   | 0    |

### Integration directive EU 66/2014

|                                                    |       |
|----------------------------------------------------|-------|
| <i>f</i> (time increase factor)                    | 1,7   |
| EEl (Energy Efficiency Index)                      | 86    |
| QBEP (maximum efficiency at air flow point) (m3/h) | 278,9 |
| PBEP (maximum efficiency at pressure point) (Pa)   | 102,9 |
| WBEP (power consumption at maximum efficiency) (W) | 91,9  |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 356 |
| Depth (mm)                | 235 |
| Minimum total height (mm) | 465 |
| Diamètre de sortie (mm)   | 118 |

### Characteristics

|                                       |       |
|---------------------------------------|-------|
| Motor quantity                        | 1     |
| Maximum pressure (Pa)                 | 190   |
| Free out airflow (m3/h)               | 600   |
| Filter technology                     | Malla |
| Booster                               | -     |
| Timer                                 | -     |
| Filter saturation indicator           | -     |
| Charcoal filter replacement indicator | -     |
| Remote control                        | -     |

### Installation

|                                         |     |
|-----------------------------------------|-----|
| Minimum distance to electric plate (mm) | 65  |
| Minimum distance to gas plate (mm)      | 650 |
| Recirculation option                    | -   |
| Charcoal filter                         | -   |
| Back draught shutter                    | -   |
| Inner shield                            | -   |

### Electric connection

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 230     |
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 105     |
| Electric shock protection | Class I |
| Power cord length (m)     | 0,5     |
| Plug type                 | No plug |

### Accessories

|                                 |     |
|---------------------------------|-----|
| Upper decorative duct extension | N_A |
| White decorative duct           | N_A |
| Black decorative duct           | N_A |

|                           |     |
|---------------------------|-----|
| Island tube booster       | N_A |
| Back draught shutter      | N_A |
| MAX PRO Metal filter      | N_A |
| Activated charcoal filter | N_A |
| Noiseless flexible duct   | N_A |
| Recirculation kit         | N_A |