


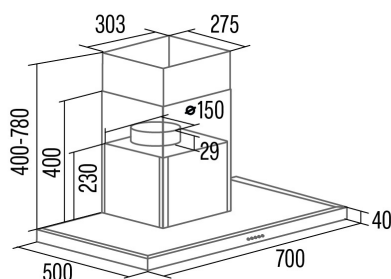

## S PRO 7000 X

Cod. **02075411**EAN **8422248371438**

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371438 |
| Subfamily | Box           |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |       |
|-----------------------------------------------|-------|
| AEC (Annual energy consumption) (kWh/year)    | 67,7  |
| EEl class (energy efficiency class)           | A     |
| FDE (fluid dynamic efficiency)                | 29,2  |
| FDE class (fluid dynamic efficiency class)    | A     |
| LE (light efficiency) (lux/W)                 | 43    |
| LE class (light efficiency class)             | A     |
| GFE (grease filtering efficiency)             | 76,3  |
| GFE class (grease filtering efficiency class) | C     |
| Airflow in normal mode MIN (m3/h)             | 419   |
| Airflow in normal mode MAX (m3/h)             | 573,9 |
| Airflow in boost mode MIN (m3/h)              | 1001  |
| Acoustic power in normal mode MIN (dB)        | 64    |
| Acoustic power in normal mode MAX (dB)        | 72    |
| Acoustic power boost mode (dB)                | 75    |
| Po (energy consumption in off mode) (W)       | 0     |
| Ps (energy consumption in standby mode) (W)   | 0,48  |

### Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 0,9   |
| EEl (Energy Efficiency Index)                              | 53,8  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 489   |
| PBEP (maximum efficiency at pressure point) (Pa)           | 424   |
| WBEP (power consumption at maximum efficiency) (W)         | 196,9 |
| WL (nominal power lighting system) (W)                     | 4,1   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 176,4 |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 760 |
| Depth (mm)                | 570 |
| Maximum total height (mm) | 830 |
| Minimum total height (mm) | 450 |
| Diamètre de sortie (mm)   | 150 |

### Characteristics

|                             |                                      |
|-----------------------------|--------------------------------------|
| Motor quantity              | 1                                    |
| Maximum pressure (Pa)       | 501,17                               |
| Filter technology           | Aluminium mesh                       |
| Control technology          | PANEL ELECTRONICO<br>DISPLAY DIGITAL |
| Power levels                | 3                                    |
| Timer                       | √                                    |
| Filter saturation indicator | -                                    |
| Connectivity                | No                                   |

### Lighting

|                |        |
|----------------|--------|
| Light model    | ECOLED |
| Ray technology | LED    |

### Installation

|                                         |     |
|-----------------------------------------|-----|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm)      | 650 |

### Electric connection

|                         |         |
|-------------------------|---------|
| Nominal voltage (V)     | 220-240 |
| Nominal frequency (Hz)  | 50      |
| Nominal input power (W) | 383     |

|                           |         |
|---------------------------|---------|
| Electric shock protection | Class I |
| Power cord length (m)     | 1,2     |
| Plug type                 | Type F  |

|                           |          |
|---------------------------|----------|
| <b>Accessories</b>        |          |
| Activated charcoal filter | 02800959 |