




# S PRO 9000 X

Cod. 02075410

EAN 8422248371421

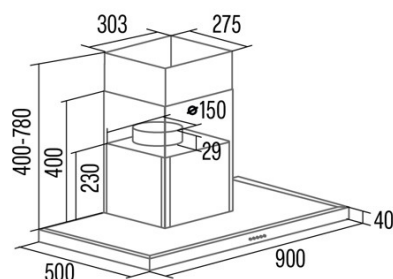

## GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371421 |
| Subfamily | Box           |

## Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |       |
|-----------------------------------------------|-------|
| AEC (Annual energy consumption) (kWh/year)    | 59,8  |
| EEl class (energy efficiency class)           | A     |
| FDE (fluid dynamic efficiency)                | 29,3  |
| FDE class (fluid dynamic efficiency class)    | A     |
| LE (light efficiency) (lux/W)                 | 35    |
| LE class (light efficiency class)             | A     |
| GFE (grease filtering efficiency)             | 76,3  |
| GFE class (grease filtering efficiency class) | C     |
| Airflow in normal mode MIN (m3/h)             | 419   |
| Airflow in normal mode MAX (m3/h)             | 628,2 |
| Airflow in boost mode MIN (m3/h)              | 1027  |
| Acoustic power in normal mode MIN (dB)        | 64    |
| Acoustic power in normal mode MAX (dB)        | 73    |
| Acoustic power boost mode (dB)                | 76    |
| Po (energy consumption in off mode) (W)       | 0     |
| Ps (energy consumption in standby mode) (W)   | 0,48  |

## Integration directive EU 66/2014

|                                                            |       |
|------------------------------------------------------------|-------|
| f (time increase factor)                                   | 0,9   |
| EEl (Energy Efficiency Index)                              | 53,1  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 438,2 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 416   |
| WBEP (power consumption at maximum efficiency) (W)         | 172,8 |
| WL (nominal power lighting system) (W)                     | 4,2   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 147,6 |

## External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 900 |
| Depth (mm)                | 500 |
| Maximum total height (mm) | 820 |
| Minimum total height (mm) | 440 |
| Diamètre de sortie (mm)   | 150 |

## Characteristics

|                             |                   |
|-----------------------------|-------------------|
| Motor quantity              | 1                 |
| Motor model                 | A1000             |
| Maximum pressure (Pa)       | 486,76            |
| Filter technology           | Aluminium mesh    |
| Control technology          | PANEL ELECTRONICO |
| Booster                     | √                 |
| Power levels                | 3                 |
| Timer                       | √                 |
| Filter saturation indicator | √                 |
| Connectivity                | No                |

## Lighting

|             |        |
|-------------|--------|
| Light model | ECOLED |
|-------------|--------|

## Installation

|                                         |          |
|-----------------------------------------|----------|
| Minimum distance to electric plate (mm) | 550      |
| Minimum distance to gas plate (mm)      | 650      |
| Back draught shutter                    | Included |

## Electric connection

|                        |         |
|------------------------|---------|
| Nominal voltage (V)    | 220-240 |
| Nominal frequency (Hz) | 50      |

|                           |         |
|---------------------------|---------|
| Nominal input power (W)   | 383     |
| Electric shock protection | Class I |
| Power cord length (m)     | 1,2     |
| Plug type                 | Type F  |

|                           |          |
|---------------------------|----------|
| <b>Accessories</b>        |          |
| Back draught shutter      | 02800706 |
| Activated charcoal filter | 02800959 |