



TFH 6630




TFH 6630 BK
Cod. **02010302** EAN **8422248082402**

- Touch Control Panel** with digital display, automatic shut-down timer and cleaning filters indicator
- 6 extraction levels, **5 + 1 TURBO**
- Extraction power (according to UNE/EN 61591): **605m³/h** - 210m³/h
- Maximum air flow (free outlet): **1000m³/h**
- Sound power (Reg.(EU) n°65/2014): 47dB(A)**, maximum: 64dB(A)
- BRUSHLESS motor. Extra silent. Maximum energy consumption **90W**
- High efficiency Strip Led lighting adjustable intensity**
- Easy-to-install system
- Stainless steel base and panelled filters washable in dishwasher** (TFH 6630 X)
- Finished in white / black / stainless steel
- Max. Pressure: 315 Pa
- 150/125 mm Outlet diameter
- Energy Class: A+**

► **Accessories (not included)**

Active charcoal filterCod. 02859394 / EAN 8422248038782.....
Check valveCod. 02832004 / EAN 84222480499.....

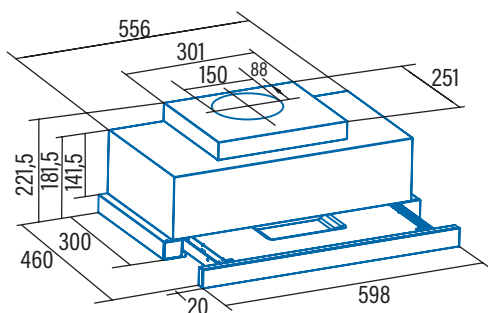

Code	02010302
EAN	8422248082402
Model	TFH 6630 BK
Type	Telescopic
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	19,3
EEl class (Energy Efficiency Class)	A+
FDE (Fluid Dynamic Efficiency)	34,4
FDE class (Fluid Dynamic Efficiency Class)	A
LE (Lighting Efficiency) (lux/W)	21,9
LE class (Lighting Efficiency Class)	B
GFE (Grease Filtering Efficiency)	66,4
GFE Class (Grease Filtering Efficiency class)	D
Air flow at minimum speed (m ³ /h)	210
Air flow at maximum speed (m ³ /h)	410
Air flow at intensive speed (TURBO) (m ³ /h)	605
Sound Power Level at minimum speed (dB)	47
Sound Power Level at maximum speed (dB)	64
Sound Power Level at intensive speed (TURBO) (dB)	70
Po (Power Consumption in off mode) (W)	0,4
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	0,8
EEl (Energy Efficiency Index)	39,2
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	275,2
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	263
WBEP (Electric Power Input at Best Efficiency Point) (W)	58,6
WL (Nominal Power Consumption of Lighting system) (W)	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	67
External Dimensions	
Width (mm)	600
Depth (mm)	300
Total max height (mm)	221,5
Total min height (mm)	221,5
Outlet Diameter (mm)	150
Characteristics	
Motor	TIDC
Extraction Levels	5 + 1
Motor Maximum Power Consumption	90
Maximum Pressure	250
Intensive Speed (TURBO) Pressure	315
Control Type	TCD6i
Automatic shut-down timer	√
Electronic Filter Saturation Indicator	√
Filter Type	Metallic
Anti-grease Filter Number	2
Inner Shield	-
Lighting	
Light Type	SS Led
Adjustable Intensity Lighting	√
N° of Lamps	1
Installation	
Minimum height distance to a electric worktop hob (mm)	550
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	√
Electric Connection	
Total Rush Power (W)	93
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS I
Plug	-
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	02832004
MAX PRO Metal Filter	-
Metal Filter	02825279
DUAL Filter (metal + active charcoal)	-
Active Charcoal Filter	02859394
Noiseless Flexible Duct	02893002