



### IB 2 PLUS BK


Cod. **08027208** EAN **8422248109420**

#### 2 cooking areas:

Right: 1 area of  $\varnothing 180$ mm of 1.4kW

Left: 1 area **with Booster function** of  $\varnothing 220$ mm of 2.3kW (max. 3kW)

- Touch Control with acoustic warning
- 9 adjustable power levels + Booster
- Timer function for each area
- Countdown alarm
- Automatic pan detection
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Frontal bevel**
- 59 cm wide**
- Total power 3.7kW**

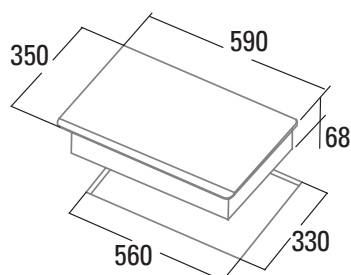

<b>Code</b>	<b>08027208</b>
<b>EAN</b>	<b>8422248109420</b>
<b>Model</b>	<b>IB 2 PLUS BK</b>
<b>Type</b>	<b>Induction</b>
<b>Product fiche</b>	
Cooking zones	2
<b>Right front zone: Diameter (mm)</b>	-
Right front zone: Power (kW)	-
Right front zone: Booster (kW)	-
Right front zone: Consumption (Wh/kg)	-
Right rear zone: Diameter (mm)	180
<b>Right rear zone: Power (kW)</b>	1,4
Right rear zone: Booster (kW)	-
Right rear zone: Consumption (Wh/kg)	184,9
Central front zone: Diameter (mm)	-
Central front zone: Power (kW)	-
<b>Central front zone: Booster (kW)</b>	-
Central front zone: Consumption (Wh/kg)	-
Central rear zone: Diameter (mm)	-
Central rear zone: Power (kW)	-
Central rear zone: Booster (kW)	-
<b>Central rear zone: Consumption (Wh/kg)</b>	-
Front left zone: Diameter (mm)	-
Front left zone: Power (kW)	-
Front left zone: Booster (kW)	-
Front left zone: Consumption (Wh/kg)	-
<b>Left rear zone: Diameter (mm)</b>	220
Left rear zone: Power (kW)	2,3
Left rear zone: Booster (kW)	3
Left rear zone: Consumption (Wh/kg)	176,3
Energy consumption of the hob (Wh/kg)	180,6
<b>Dimensions</b>	
Product width (mm)	590
Product depth (mm)	350
Product height (mm)	68
Built-in height (mm)	560
Built-in depth (mm)	330
Ventilation slot (mm)	5
Fixing system	Quick-Fix System
<b>Finishing</b>	
Colour	Black
Aesthetic	Front bevel
<b>Control</b>	
Control type	Touch
Power selection (+/-)	Centralized
Power levels	9 + Booster
Timer	Yes
Countdown alarm	Yes
Power management	No
<b>Security</b>	
Safety lock	Yes
Residual heat indicator	Yes
Automatic pan detection	Yes
Automatic safety switch-off	Yes
Protection against liquid spillage	Yes
<b>Electrical connection</b>	
Nominal voltage (V)	220-240
Mains frequency (Hz)	50-60
Max Product power (kW)	3,7