
GRUPOS **FILTRANTES**



# CPK 6000 GR

Cod. **02025003** EAN **8422248357166**

LED

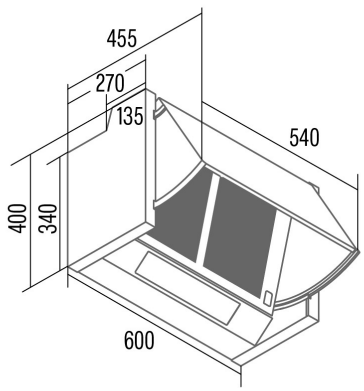


## INFORMACIÓN GENERAL

| | |
|---|---|
| EAN/UPC | 8422248357166 |
| Subfamily | Insert |

## Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|---|
| AEC (Energy consumption per year) (kWh/año) | 24 |
| EEI class (Energy efficiency class) | B |
| FDE (Fluid dynamic efficiency) | 18,4 |
| FDE class (Fluid dynamic efficiency class) | C |
| LE (Light efficiency) (lux/W) | 15,5 |
| LE class (Light efficiency class) | D |
| GFE (Grease filtering efficiency) | 51,9 |
| GFE Class (Grease filtering efficiency class) | F |
| Normal mode airflow MIN (m3/h) | 140 |
| Normal mode airflow MAX (m3/h) | 265 |
| Normal mode acustic power MIN (dB) | 50 |
| Normal mode acustic power MAX (dB) | 63 |
| Po (Off-mode power consumption) (W) | 0 |
| Ps (Stand-by power consumption) (W) | 0 |

## Integration directive EU 66/2014

| | |
|---|---|
| *f* (Factor Increase in the time) | 1,3 |
| EEI (Energy efficiency Index) | 56,7 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 150 |
| PBEP (Maximum pressure point efficiency) (Pa) | 202,5 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 46 |
| WL (Rated power lighting system) (W) | 3 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 46,5 |

## External Dimensions

| | |
|---|---|
| Width (mm) | 600 |
| Depth (mm) | 270 |
| Maximum Total Height (mm) | 400 |
| Minimum Total Height (mm) | 400 |
| Outlet Diameter (mm) | 120 |

## Characteristics

| | |
|---|---|
| Motor Quantity | 1 |
| Motor Model | K11 360 |
| Maximum Pressure (Pa) | 224 |
| Filter Technology | Malla |
| Control Tecnology | Mechanical slider |
| Booster | - |
| Power levels | 3 |
| Timer | - |
| Filter Saturation Indicator | - |
| Charcoal Filter Change Indicator | - |
| Dimmer Function | - |
| Connectivity | No |
| Remote control | - |
| Display | - |

## Lighting

| | |
|---|---|
| Light Model | LED E-14 |
| Lightning Technology | LED |

## Installation

| | |
|---|---|
| Minimum distance to an electric cooktop (mm) | 550 |
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option | - |

| | |
|---|---|
| Back Draught Shutter | No |
| Inner shield | √ |

## Electric Connection

| | |
|---|---|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50 |
| Rated power input (W) | 68 |
| Protection against electric shock | Class II |
| Plug type | No plug |

## Accessories

| | |
|---|---|
| Back Draught Shutter | '02849003 |
| Active Charcoal Filter | '02849489 |