
DECORATIVAS **VERTICAL**



# LENA 500XGBK

Cod. **02032206** EAN **8422248102377**

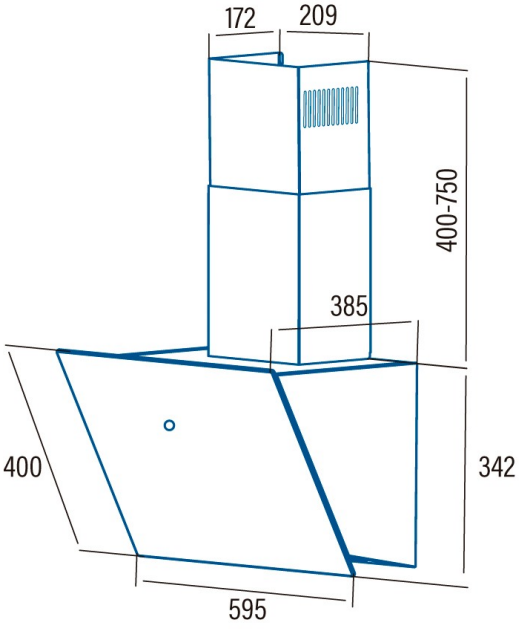


## INFORMACIÓN GENERAL

| | |
|---|---|
| EAN/UPC | 8422248102377 |
| Subfamily | Angle Glass |

### Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|---|
| AEC (Energy consumption per year) (kWh/año) | 43,57 |
| EEI class (Energy efficiency class) | B |
| FDE (Fluid dynamic efficiency) | 22,94 |
| FDE class (Fluid dynamic efficiency class) | C |
| LE (Light efficiency) (lux/W) | 43,6 |
| LE class (Light efficiency class) | A |
| GFE (Grease filtering efficiency) | 82,6 |
| GFE Class (Grease filtering efficiency class) | C |
| Normal mode airflow MIN (m3/h) | 311,71 |
| Normal mode airflow MAX (m3/h) | 498,46 |
| Normal mode acustic power MIN (dB) | 44,1 |
| Normal mode acustic power MAX (dB) | 62,8 |
| Ps (Stand-by power consumption) (W) | 0,34 |

### Integration directive EU 66/2014

| | |
|---|---|
| *f* (Factor Increase in the time) | 1,17 |
| EEI (Energy efficiency Index) | 62,2 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 264,09 |
| PBEP (Maximum pressure point efficiency) (Pa) | 301,94 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 95,56 |
| WL (Rated power lighting system) (W) | 3 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 130,8 |

### External Dimensions

| | |
|---|---|
| Width (mm) | 495 |
| Depth (mm) | 385 |
| Maximum Total Height (mm) | 1092 |
| Minimum Total Height (mm) | 742 |
| Outlet Diameter (mm) | 150 |

### Characteristics

| | |
|---|---|
| Motor Quantity | 1 |
| Motor Model | TT500 |
| Maximum Pressure (Pa) | 380 |
| Free Outlet Airflow (m3/h) | 750 |
| Filter Technology | Aluminium mesh |
| Control Tecnology | Electronic Touch Control |
| Booster | - |
| Power levels | 3 |
| Timer | √ |
| Filter Saturation Indicator | - |
| Charcoal Filter Change Indicator | - |
| Dimmer Function | - |
| Connectivity | - |
| Remote control | - |
| Display | Display |

### Lighting

| | |
|---|---|
| Lightning Technology | LED |

### Installation

| | |
|---|---|
| Minimum distance to an electric cooktop (mm) | 650 |
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option | √ |
| Charcoal Filter | - |

| | |
|---|---|
| Back Draught Shutter | Included |
| Inner shield | - |

## Electric Connection

| | |
|---|---|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 123 |
| Protection against electric shock | Class I |
| Plug type | Type F |

## Accessories

| | |
|---|---|
| Upper Decorative Duct Extension | No |
| White Decorative Duct | No |
| Black Decorative Duct | No |
| Island Tube Enhancer | No |
| Back Draught Shutter | Included |
| MAX PRO Metal Filter | No |
| Active Charcoal Filter | 2859492 |
| Noiseless Flexible Duct | 2893002 |
| Recirculating kit | 2894400 |