
DECORATIVAS **CAJÓN**



S PRO 9000 X

Cod. **02075410** EAN **8422248371421**



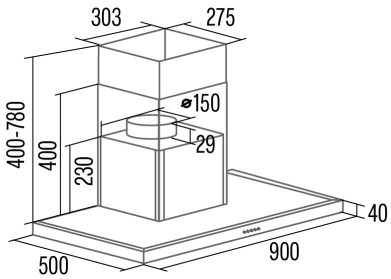

INFORMACIÓN GENERAL

EAN/UPC	8422248371421
Subfamily	Box

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	59,8
EEI class (Energy efficiency class)	A
FDE (Fluid dynamic efficiency)	29,3
FDE class (Fluid dynamic efficiency class)	A
LE (Light efficiency) (lux/W)	35
LE class (Light efficiency class)	A
GFE (Grease filtering efficiency)	76,3
GFE Class (Grease filtering efficiency class)	C
Normal mode airflow MIN (m3/h)	419
Normal mode airflow MAX (m3/h)	628,2
Boost mode airflow (m3/h)	1027
Normal mode acustic power MIN (dB)	64
Normal mode acustic power MAX (dB)	73
Boost mode acustic power (dB)	76
Po (Off-mode power consumption) (W)	0
Ps (Stand-by power consumption) (W)	0,48

Integration directive EU 66/2014

f (Factor Increase in the time)	0,9
EEI (Energy efficiency Index)	53,1
QBEP (Maximum airflow point efficiency) (m3/h)	438,2
PBEP (Maximum pressure point efficiency) (Pa)	416
WBEP (Electrical power consumption at maximum efficiency) (W)	172,8
WL (Rated power lighting system) (W)	4,2
EMIDDLE (Average illuminance on the cooking surface) (lux)	147,6

External Dimensions

Width (mm)	900
Depth (mm)	500
Maximum Total Height (mm)	820
Minimum Total Height (mm)	440
Outlet Diameter (mm)	150

Characteristics

Motor Quantity	1
Motor Model	A1000
Maximum Pressure (Pa)	486,76
Filter Technology	Aluminium mesh
Control Tecnology	PANEL ELECTRONICO
Booster	√
Power levels	3
Timer	√
Filter Saturation Indicator	√
Connectivity	No

Lighting

Light Model	ECOLED

Installation

Minimum distance to an electric cooktop (mm)	550
Minimum distance to a gas cooktop (mm)	650
Back Draught Shutter	Included

Electric Connection

Rated voltage (V)	220-240

Rated frequency (Hz)	50
Rated power input (W)	383
Protection against electric shock	Class I
Power cord length (m)	1,2
Plug type	Type F

Accessories

Back Draught Shutter	02800706
Active Charcoal Filter	02800959