


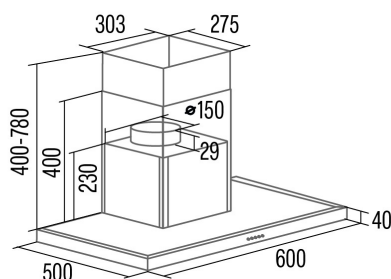

S PRO 6000 BK

Cod. **02075415**EAN **8422248371506**

INFORMACIÓN GENERAL

EAN/UPC	8422248371506
Subfamily	Box

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	67,8
EEI class (Energy efficiency class)	A
FDE (Fluid dynamic efficiency)	29,2
FDE class (Fluid dynamic efficiency class)	A
LE (Light efficiency) (lux/W)	47
LE class (Light efficiency class)	A
GFE (Grease filtering efficiency)	76,3
GFE Class (Grease filtering efficiency class)	C
Normal mode airflow MIN (m3/h)	417
Normal mode airflow MAX (m3/h)	577,7
Boost mode airflow (m3/h)	1001
Normal mode acoustic power MIN (dB)	64
Normal mode acoustic power MAX (dB)	72
Boost mode acoustic power (dB)	75
Po (Off-mode power consumption) (W)	0
Ps (Stand-by power consumption) (W)	0,48

Integration directive EU 66/2014

<i>f</i> (Factor Increase in the time)	0,9
EEI (Energy efficiency Index)	53,8
QBEP (Maximum airflow point efficiency) (m3/h)	497,7
PBEP (Maximum pressure point efficiency) (Pa)	417
WBEP (Electrical power consumption at maximum efficiency) (W)	197,4
WL (Rated power lighting system) (W)	4,1
EMIDDLE (Average illuminance on the cooking surface) (lux)	190,8

Characteristics

Motor Quantity	1
Motor Model	A1000
Maximum Pressure (Pa)	473,39
Control Tecnology	PANEL ELECTRONICO DISPLAY DIGITAL
Booster	√

Lighting

Light Model	ECOLED
Lightning Technology	LED

Electric Connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50
Rated power input (W)	383
Protection against electric shock	Class I
Power cord length (m)	1,2
Plug type	Type F

Accessories

Back Draught Shutter	02800706
Active Charcoal Filter	02800959