


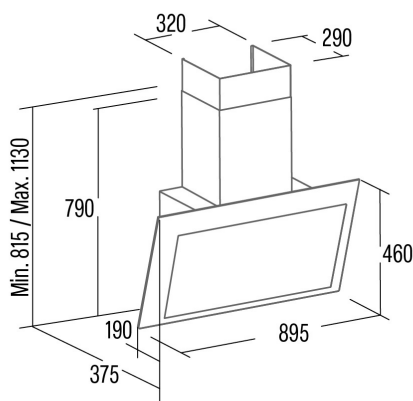

# THALASSA EVO 900 GBK

Cod. **02139408**EAN **8422248356398**

## INFORMACIÓN GENERAL

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248356398 |
| Subfamily | Angle Glass   |

## Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |        |
|-----------------------------------------------|--------|
| AEC (Energy consumption per year) (kWh/año)   | 28,8   |
| EEI class (Energy efficiency class)           | A++    |
| FDE (Fluid dynamic efficiency)                | 41,7   |
| FDE class (Fluid dynamic efficiency class)    | A      |
| LE (Light efficiency) (lux/W)                 | 21     |
| LE class (Light efficiency class)             | B      |
| GFE (Grease filtering efficiency)             | 85,3   |
| GFE Class (Grease filtering efficiency class) | B      |
| Normal mode airflow MIN (m3/h)                | 300,2  |
| Normal mode airflow MAX (m3/h)                | 624,1  |
| Boost mode airflow (m3/h)                     | 1016,5 |
| Normal mode acoustic power MIN (dB)           | 44,6   |
| Normal mode acoustic power MAX (dB)           | 62,1   |
| Boost mode acoustic power (dB)                | 72,7   |
| Po (Off-mode power consumption) (W)           | 0      |
| Ps (Stand-by power consumption) (W)           | 0,35   |

## Integration directive EU 66/2014

|                                                               |       |
|---------------------------------------------------------------|-------|
| f (Factor Increase in the time)                               | 0,5   |
| EEI (Energy efficiency Index)                                 | 33    |
| QBEP (Maximum airflow point efficiency) (m3/h)                | 481,5 |
| PBEP (Maximum pressure point efficiency) (Pa)                 | 380   |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 122   |
| WL (Rated power lighting system) (W)                          | 9     |
| EMIDDLE (Average illuminance on the cooking surface) (lux)    | 187   |

## External Dimensions

|                           |      |
|---------------------------|------|
| Width (mm)                | 900  |
| Depth (mm)                | 375  |
| Maximum Total Height (mm) | 1130 |
| Minimum Total Height (mm) | 815  |
| Outlet Diameter (mm)      | 150  |

## Characteristics

|                                  |                          |
|----------------------------------|--------------------------|
| Motor Quantity                   | 1                        |
| Motor Model                      | BT5DC-1000               |
| Filter Technology                | Aluminium mesh           |
| Control Technology               | Electronic Touch Control |
| Booster                          | √                        |
| Power levels                     | 6                        |
| Timer                            | √                        |
| Filter Saturation Indicator      | √                        |
| Charcoal Filter Change Indicator | √                        |
| Dimmer Function                  | √                        |
| Connectivity                     | √                        |
| Remote control                   | -                        |
| Display                          | Display                  |

## Lighting

|                      |               |
|----------------------|---------------|
| Light Model          | SSLED BICOLOR |
| Lightning Technology | LED           |

## Installation

|                                              |     |
|----------------------------------------------|-----|
| Minimum distance to an electric cooktop (mm) | 550 |
| Minimum distance to a gas cooktop (mm)       | 650 |

|                      |    |
|----------------------|----|
| Recirculation Option | √  |
| Charcoal Filter      | √  |
| Back Draught Shutter | No |
| Inner shield         | -  |

#### Electric Connection

|                                   |          |
|-----------------------------------|----------|
| Rated voltage (V)                 | 220-240  |
| Rated frequency (Hz)              | 50/60    |
| Rated power input (W)             | 259      |
| Protection against electric shock | Class II |
| Power cord length (m)             | 1000     |
| Plug type                         | No plug  |

#### Accessories

|                                 |          |
|---------------------------------|----------|
| Upper Decorative Duct Extension | 02861300 |
| White Decorative Duct           | 02861001 |
| Black Decorative Duct           | 02861401 |
| Back Draught Shutter            | 02832004 |
| Active Charcoal Filter          | 02859398 |
| Noiseless Flexible Duct         | 02893002 |
| Recirculating kit               | 02800013 |