
DECORATIVAS **ESQUINA**



# GALA 900 L

Cod. **02169304** EAN **8422248355575**

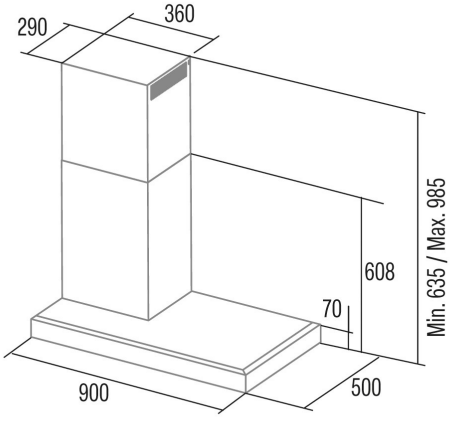


## INFORMACIÓN GENERAL

| | |
|---|---|
| EAN/UPC | 8422248355575 |
| Subfamily | Corner |

## Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|---|
| AEC (Energy consumption per year) (kWh/año) | 53,6 |
| EEI class (Energy efficiency class) | A |
| FDE (Fluid dynamic efficiency) | 30,7 |
| FDE class (Fluid dynamic efficiency class) | A |
| LE (Light efficiency) (lux/W) | 23,1 |
| LE class (Light efficiency class) | B |
| GFE (Grease filtering efficiency) | 91,2 |
| GFE Class (Grease filtering efficiency class) | B |
| Normal mode airflow MIN (m3/h) | 340 |
| Normal mode airflow MAX (m3/h) | 600 |
| Boost mode airflow (m3/h) | 802 |
| Normal mode acustic power MIN (dB) | 50 |
| Normal mode acustic power MAX (dB) | 65 |
| Boost mode acustic power (dB) | 67 |
| Po (Off-mode power consumption) (W) | 0,48 |
| Ps (Stand-by power consumption) (W) | 0,48 |

## Integration directive EU 66/2014

| | |
|---|---|
| *f* (Factor Increase in the time) | 0,9 |
| EEI (Energy efficiency Index) | 52,1 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 443,1 |
| PBEP (Maximum pressure point efficiency) (Pa) | 427,1 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 171 |
| WL (Rated power lighting system) (W) | 3 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 69 |

## External Dimensions

| | |
|---|---|
| Width (mm) | 900 |
| Depth (mm) | 500 |
| Maximum Total Height (mm) | 985 |
| Minimum Total Height (mm) | 635 |
| Outlet Diameter (mm) | 150, 125 |

## Characteristics

| | |
|---|---|
| Motor Quantity | 1 |
| Motor Model | BT3 |
| Maximum Pressure (Pa) | 470 |
| Control Tecnology | Mechanical push button |
| Booster | √ |
| Power levels | 4 |
| Timer | √ |
| Filter Saturation Indicator | √ |
| Charcoal Filter Change Indicator | √ |
| Dimmer Function | √ |
| Connectivity | No |
| Remote control | - |

## Lighting

| | |
|---|---|
| Light Model | ECOLED STRIP |
| Lightning Technology | LED |

## Installation

| | |
|---|---|
| Minimum distance to an electric cooktop (mm) | 550 |
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option | √ |

| | |
|---|---|
| Charcoal Filter | √ |
| Back Draught Shutter | No |
| Inner shield | - |

## Electric Connection

| | |
|---|---|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50 |
| Rated power input (W) | 285 |
| Protection against electric shock | Class II |
| Plug type | Type A |

## Accessories

| | |
|---|---|
| MAX PRO Metal Filter | 02800917 |
| Active Charcoal Filter | 02859392 |
| Noiseless Flexible Duct | 02893002 |