




# CORONA X NO DRIP 60

Cod. 02186310

EAN 8422248370752

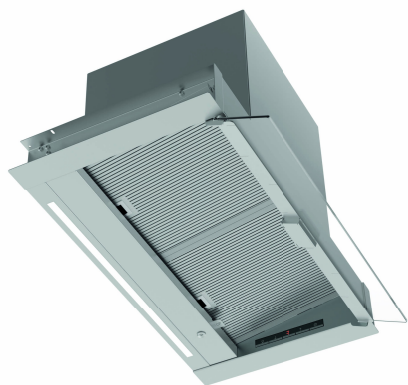

## INFORMACIÓN GENERAL

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248370752 |
| Subfamily | Integrated    |

## Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |       |
|-----------------------------------------------|-------|
| AEC (Energy consumption per year) (kWh/año)   | 54,9  |
| EEl class (Energy efficiency class)           | A     |
| FDE (Fluid dynamic efficiency)                | 29,2  |
| FDE class (Fluid dynamic efficiency class)    | A     |
| LE (Light efficiency) (lux/W)                 | 22,3  |
| LE class (Light efficiency class)             | B     |
| GFE (Grease filtering efficiency)             | 69,5  |
| GFE Class (Grease filtering efficiency class) | D     |
| Normal mode airflow MIN (m3/h)                | 272,4 |
| Normal mode airflow MAX (m3/h)                | 608,9 |
| Boost mode airflow (m3/h)                     | 766   |
| Normal mode acoustic power MIN (dB)           | 54    |
| Normal mode acoustic power MAX (dB)           | 69    |
| Boost mode acoustic power (dB)                | 71    |
| Po (Off-mode power consumption) (W)           | 0,39  |
| Ps (Stand-by power consumption) (W)           | 0     |

## Integration directive EU 66/2014

|                                                               |       |
|---------------------------------------------------------------|-------|
| f (Factor Increase in the time)                               | 0,9   |
| EEl (Energy efficiency Index)                                 | 52,2  |
| QBEP (Maximum airflow point efficiency) (m3/h)                | 437,8 |
| PBEP (Maximum pressure point efficiency) (Pa)                 | 385   |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 160,5 |
| WL (Rated power lighting system) (W)                          | 3     |
| EMIDDLE (Average illuminance on the cooking surface) (lux)    | 67    |

## External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 595 |
| Depth (mm)                | 310 |
| Maximum Total Height (mm) | 334 |
| Minimum Total Height (mm) | 334 |
| Outlet Diameter (mm)      | 150 |

## Characteristics

|                                  |                          |
|----------------------------------|--------------------------|
| Motor Quantity                   | 1                        |
| Motor Model                      | BT5AC                    |
| Maximum Pressure (Pa)            | 450                      |
| Filter Technology                | Malla                    |
| Control Technology               | Electronic Touch Control |
| Booster                          | √                        |
| Power levels                     | 4                        |
| Timer                            | √                        |
| Filter Saturation Indicator      | √                        |
| Charcoal Filter Change Indicator | √                        |
| Dimmer Function                  | √                        |
| Connectivity                     | Auto                     |
| Remote control                   | -                        |
| Display                          | Display                  |

## Lighting

|                      |       |
|----------------------|-------|
| Light Model          | SSLED |
| Lightning Technology | LED   |

## Installation

|                                              |     |
|----------------------------------------------|-----|
| Minimum distance to an electric cooktop (mm) | 450 |
|----------------------------------------------|-----|

|                                        |     |
|----------------------------------------|-----|
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option                   | √   |
| Charcoal Filter                        | -   |
| Inner shield                           | -   |

#### Electric Connection

|                                   |          |
|-----------------------------------|----------|
| Rated voltage (V)                 | 220-240  |
| Rated frequency (Hz)              | 50/60    |
| Rated power input (W)             | 160,5    |
| Protection against electric shock | Class II |
| Power cord length (m)             | 1100     |
| Plug type                         | No plug  |

#### Accessories

|                                 |          |
|---------------------------------|----------|
| Upper Decorative Duct Extension | 02861306 |
| Black Decorative Duct           | 02861307 |
| Back Draught Shutter            | 02832004 |
| Active Charcoal Filter          | 02859398 |
| Noiseless Flexible Duct         | 02893002 |
| Recirculating kit               | 02800013 |