
TERMOS **ELÉCTRICOS**



# CTRC-30-M

Cod. **03110003** EAN **8422248096621**

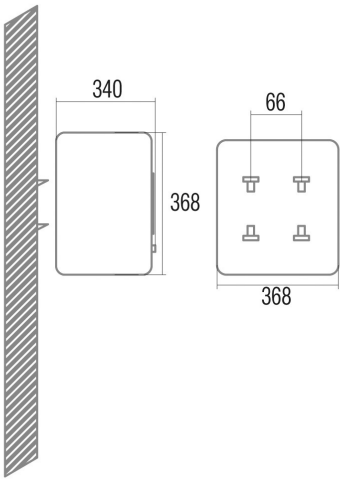


## INFORMACIÓN GENERAL

| | |
|---|---|
| EAN/UPC | 8422248096621 |
| Subfamily | Electric |

## Product fiche according to EU Regulation nº 812/2012

| | |
|---|---|
| Declared Load Profile | S |
| Water Heating Energy Class | C |
| Water Heating Energy Efficiency (%) | 33 |
| Annual electricity consumption (kWh/year) | 558 |
| Thermostat temperature settings | 75 |

## Features

| | |
|---|---|
| Capacity (L) | 30 |
| Number of persons | 1-2 |
| Installation | Vertical |
| Minimum set temperature | 30 |
| Maximum set temperature | 75 |
| Type of heating element | Enamel |
| Heating time 15ºC-65ºC (min) | 33 |
| Static losses 65ºC (kWh/24h) | 2,46 |
| Coating thickness (mm) | 5 |

## Controls

| | |
|---|---|
| Type of control | Mechanical |
| Control position | Front |
| Electrical connection indicator | - |
| Temperature indicator | - |
| Heating indicator | - |

## Safety

| | |
|---|---|
| Overheating protection | √ |
| Safety temperature (ºC) | 101 |
| Freezing protection | - |
| Water protection index | IPX4 |
| Maximum Working Pressure (Mpa) | 0,75 |
| Magnesium Anode Dimensions (mm) | D18x110 |

## Power connection

| | |
|---|---|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 1500 |
| Protection against electric shock | Class I |
| Power cord length (m) | 1,5 |
| Plug type | Type F |

## Installation

| | |
|---|---|
| Width (mm) | 440 |
| Height (mm) | 440 |
| Depth (mm) | 420 |