



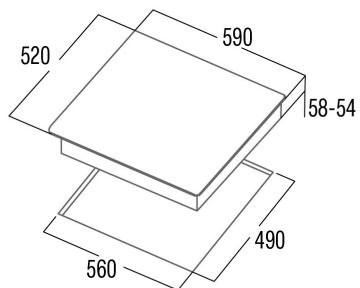

## IB 6303E2 BK

Cod. 08063120

EAN 8422248355919

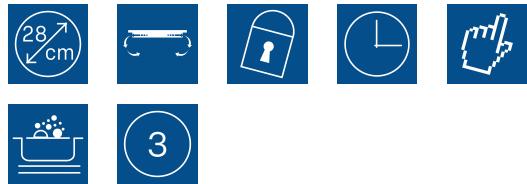

### INFORMACIÓN GENERAL

EAN/UPC	8422248355919
Subfamily	Induction

### Product fiche

Number of cooking zones	3
Zone 1: Technology	Induction
Zone 1: Position	Front Left
Zone 1: Diameter of the zone (mm)	21
Zone 1: Power (kW)	2300
Zone 1: Booster (kW)	2600
Zone 1: Consumption (Wh / kg)	1776
Zone 1B: Diameter of the zone (mm)	N/A
Zone 1C: Diameter of the zone (mm)	N/A
Zone 2: Technology	Induction
Zone 2: Position	Rear Left
Zone 2: Diameter of the zone (mm)	16
Zone 2: Power (kW)	1200
Zone 2: Booster (kW)	1500
Zone 2: Consumption (Wh / kg)	170
Zone 2B: Diameter of the zone (mm)	N/A
Zone 2C: Diameter of the zone (mm)	N/A
Zone 3: Technology	Induction
Zone 3: Position	Right
Zone 3: Diameter of the zone (mm)	28
Zone 3: Power (kW)	2300
Zone 3: Booster (kW)	300
Zone 3: Consumption (Wh / kg)	1897
Zone 3B: Diameter of the zone (mm)	N/A
Zone 3C: Diameter of the zone (mm)	N/A
Zone 4: Technology	N/A
Zone 4: Diameter of the zone (mm)	N/A
Zone 4B: Diameter of the zone (mm)	N/A
Zone 4C: Diameter of the zone (mm)	N/A
Zone 5: Technology	N/A
Zone 5: Diameter of the zone (mm)	N/A
Zone 5B: Diameter of the zone (mm)	N/A
Zone 5C: Diameter of the zone (mm)	N/A
Zone 6: Technology	N/A
Zone 6: Diameter of the zone (mm)	N/A
Zone 6B: Diameter of the zone (mm)	N/A
Zone 6C: Diameter of the zone (mm)	N/A

### Dimensions

Width (mm)	590
Height (mm)	58
Depth (mm)	520
Built-in width (mm)	20
Built-in height (mm)	50

### Control

Control Position	Front Centre
Power levels	9 + Booster
Cooking time programming	✓

### Security

Security lock	✓
Child lock	Yes (Key)
Residual heat indicator	✓
Automatic safety shutdown	✓

### Electrical connection

Rated voltage (V)	220-230
Rated frequency (Hz)	50/60
Rated power input (W)	7100
Multi Phase Connection Option	2 phases
Protection against electric shock	Class I