



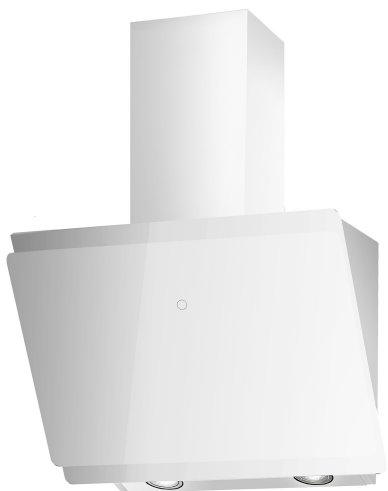

## WANDA 600 XGWH

Cod. 02027012

EAN 8422248102353

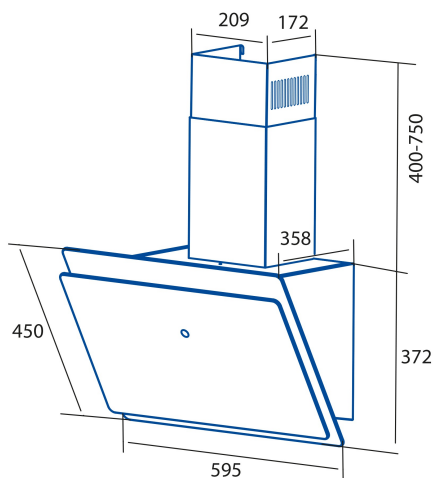

### INFORMACIÓN GENERAL

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248102353 |
| Subfamily | Angle Glass   |

### Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |        |
|-----------------------------------------------|--------|
| AEC (Energy consumption per year) (kWh/año)   | 14,94  |
| EEL class (Energy efficiency class)           | AP     |
| FDE (Fluid dynamic efficiency)                | 31,01  |
| FDE class (Fluid dynamic efficiency class)    | A      |
| LE (Light efficiency) (lux/W)                 | 54,6   |
| LE class (Light efficiency class)             | A      |
| GFE (Grease filtering efficiency)             | 78     |
| GFE Class (Grease filtering efficiency class) | C      |
| Normal mode airflow MIN (m3/h)                | 234,1  |
| Normal mode airflow MAX (m3/h)                | 522,81 |
| Normal mode acoustic power MIN (dB)           | 35     |
| Normal mode acoustic power MAX (dB)           | 61,8   |
| Po (Off-mode power consumption) (W)           | 0,45   |

### Integration directive EU 66/2014

|                                                               |        |
|---------------------------------------------------------------|--------|
| f (Factor Increase in the time)                               | 0,883  |
| EEL (Energy efficiency Index)                                 | 38,6   |
| QBEP (Maximum airflow point efficiency) (m3/h)                | 248,01 |
| PBEP (Maximum pressure point efficiency) (Pa)                 | 178,05 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 39,55  |
| WL (Rated power lighting system) (W)                          | 3      |
| EMIDDLE (Average illuminance on the cooking surface) (lux)    | 163,8  |

### External Dimensions

|                           |      |
|---------------------------|------|
| Width (mm)                | 595  |
| Depth (mm)                | 358  |
| Maximum Total Height (mm) | 1122 |
| Minimum Total Height (mm) | 772  |
| Outlet Diameter (mm)      | 150  |

### Characteristics

|                                  |                          |
|----------------------------------|--------------------------|
| Motor Quantity                   | 1                        |
| Motor Model                      | BLDC                     |
| Maximum Pressure (Pa)            | 430                      |
| Free Outlet Airflow (m3/h)       | 1000                     |
| Filter Technology                | Aluminium mesh           |
| Control Technology               | Electronic Touch Control |
| Booster                          | -                        |
| Power levels                     | 9                        |
| Timer                            | √                        |
| Filter Saturation Indicator      | -                        |
| Charcoal Filter Change Indicator | -                        |
| Dimmer Function                  | -                        |
| Connectivity                     | -                        |
| Remote control                   | -                        |
| Display                          | Display                  |

### Lighting

|                      |     |
|----------------------|-----|
| Lightning Technology | LED |
|----------------------|-----|

### Installation

|                                              |     |
|----------------------------------------------|-----|
| Minimum distance to an electric cooktop (mm) | 650 |
| Minimum distance to a gas cooktop (mm)       | 650 |
| Recirculation Option                         | √   |
| Charcoal Filter                              | -   |

|                      |          |
|----------------------|----------|
| Back Draught Shutter | Included |
| Inner shield         | -        |

**Electric Connection**

|                                   |         |
|-----------------------------------|---------|
| Rated voltage (V)                 | 220-240 |
| Rated frequency (Hz)              | 50/60   |
| Rated power input (W)             | 73      |
| Protection against electric shock | Class I |
| Plug type                         | Type F  |

**Accessories**

|                                 |          |
|---------------------------------|----------|
| Upper Decorative Duct Extension | No       |
| White Decorative Duct           | No       |
| Black Decorative Duct           | No       |
| Island Tube Enhancer            | No       |
| Back Draught Shutter            | Included |
| MAX PRO Metal Filter            | No       |
| Active Charcoal Filter          | 2859492  |
| Noiseless Flexible Duct         | 2893002  |
| Recirculating kit               | 2894400  |