




THALASSA EVO 700 GBK

Cod. **02137408**

EAN **8422248356411**

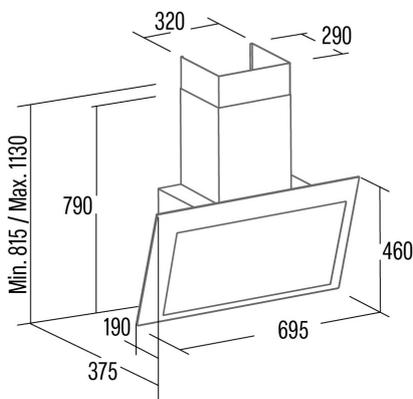

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248356411 |
| Subfamily | Angle Glass |

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|--------|
| AEC (Energy consumption per year) (kWh/año) | 28,8 |
| EEL class (Energy efficiency class) | A++ |
| FDE (Fluid dynamic efficiency) | 41,7 |
| FDE class (Fluid dynamic efficiency class) | A |
| LE (Light efficiency) (lux/W) | 21 |
| LE class (Light efficiency class) | B |
| GFE (Grease filtering efficiency) | 85,3 |
| GFE Class (Grease filtering efficiency class) | B |
| Normal mode airflow MIN (m3/h) | 300,2 |
| Normal mode airflow MAX (m3/h) | 624,1 |
| Boost mode airflow (m3/h) | 1016,5 |
| Normal mode acoustic power MIN (dB) | 44,6 |
| Normal mode acoustic power MAX (dB) | 62,1 |
| Boost mode acoustic power (dB) | 72,7 |
| Po (Off-mode power consumption) (W) | 0 |
| Ps (Stand-by power consumption) (W) | 0,35 |

Integration directive EU 66/2014

| | |
|---|-------|
| f (Factor Increase in the time) | 0,5 |
| EEL (Energy efficiency Index) | 33 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 481,5 |
| PBEP (Maximum pressure point efficiency) (Pa) | 380 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 122 |
| WL (Rated power lighting system) (W) | 9 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 187 |

External Dimensions

| | |
|---------------------------|------|
| Width (mm) | 700 |
| Depth (mm) | 375 |
| Maximum Total Height (mm) | 1130 |
| Minimum Total Height (mm) | 815 |
| Outlet Diameter (mm) | 150 |

Characteristics

| | |
|----------------------------------|--------------------------|
| Motor Quantity | 1 |
| Motor Model | BT5DC-1000 |
| Filter Technology | Aluminium mesh |
| Control Technology | Electronic Touch Control |
| Booster | ✓ |
| Power levels | 6 |
| Timer | ✓ |
| Filter Saturation Indicator | ✓ |
| Charcoal Filter Change Indicator | ✓ |
| Dimmer Function | ✓ |
| Connectivity | ✓ |
| Remote control | - |
| Display | Display |

Lighting

| | |
|---------------------|---------------|
| Light Model | SSLED BICOLOR |
| Lighting Technology | LED |

Installation

| | |
|--|-----|
| Minimum distance to an electric cooktop (mm) | 550 |
| Minimum distance to a gas cooktop (mm) | 650 |

| | |
|----------------------|---|
| Recirculation Option | √ |
| Charcoal Filter | √ |
| Back Draught Shutter | - |
| Inner shield | - |

Electric Connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 259 |
| Protection against electric shock | Class II |
| Power cord length (m) | 1 |
| Plug type | No plug |

Accessories

| | |
|---------------------------------|----------|
| Upper Decorative Duct Extension | 02861300 |
| White Decorative Duct | 02861001 |
| Black Decorative Duct | 02861401 |
| Back Draught Shutter | 02832004 |
| Active Charcoal Filter | 02859398 |
| Noiseless Flexible Duct | 02893002 |
| Recirculating kit | 02800013 |
