




## F-2050 WH

Cod. 02015006

EAN 8422248086110

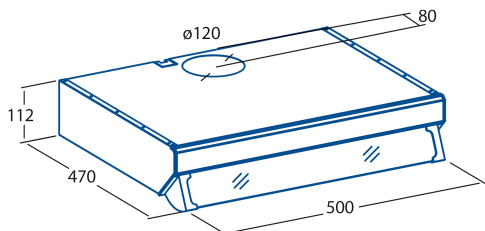

### INFORMACIÓN GENERAL

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248086110 |
| Subfamily | Conventional  |

### Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|                                               |       |
|-----------------------------------------------|-------|
| AEC (Energy consumption per year) (kWh/año)   | 44,7  |
| EEL class (Energy efficiency class)           | C     |
| FDE (Fluid dynamic efficiency)                | 9,2   |
| FDE class (Fluid dynamic efficiency class)    | E     |
| LE (Light efficiency) (lux/W)                 | 27,3  |
| LE class (Light efficiency class)             | B     |
| GFE (Grease filtering efficiency)             | 67,7  |
| GFE Class (Grease filtering efficiency class) | D     |
| Normal mode airflow MIN (m3/h)                | 107,5 |
| Normal mode airflow MAX (m3/h)                | 193,5 |
| Normal mode acoustic power MIN (dB)           | 56    |
| Normal mode acoustic power MAX (dB)           | 68    |
| Po (Off-mode power consumption) (W)           | 0     |
| Ps (Stand-by power consumption) (W)           | 0     |

### Integration directive EU 66/2014

|                                                               |       |
|---------------------------------------------------------------|-------|
| f (Factor Increase in the time)                               | 1,7   |
| EEL (Energy efficiency Index)                                 | 82,2  |
| QBEP (Maximum airflow point efficiency) (m3/h)                | 105,2 |
| PBEP (Maximum pressure point efficiency) (Pa)                 | 209   |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 201   |
| WL (Rated power lighting system) (W)                          | 5,5   |
| EMIDDLE (Average illuminance on the cooking surface) (lux)    | 150   |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 600 |
| Depth (mm)                | 470 |
| Maximum Total Height (mm) | 112 |
| Minimum Total Height (mm) | 112 |
| Outlet Diameter (mm)      | 120 |

### Characteristics

|                                  |                        |
|----------------------------------|------------------------|
| Motor Quantity                   | 1                      |
| Motor Model                      | L1N                    |
| Maximum Pressure (Pa)            | 325                    |
| Free Outlet Airflow (m3/h)       | 350                    |
| Filter Technology                | Aluminium mesh         |
| Control Technology               | Mechanical push button |
| Booster                          | -                      |
| Power levels                     | 3                      |
| Timer                            | -                      |
| Filter Saturation Indicator      | -                      |
| Charcoal Filter Change Indicator | -                      |
| Dimmer Function                  | -                      |
| Connectivity                     | -                      |
| Remote control                   | -                      |
| Display                          | -                      |

### Lighting

|                      |          |
|----------------------|----------|
| Light Model          | LED E-14 |
| Lightning Technology | LED      |

### Installation

|                                              |     |
|----------------------------------------------|-----|
| Minimum distance to an electric cooktop (mm) | 550 |
| Minimum distance to a gas cooktop (mm)       | 650 |

|                      |   |
|----------------------|---|
| Recirculation Option | √ |
| Charcoal Filter      | - |
| Back Draught Shutter | - |
| Inner shield         | - |

#### Electric Connection

|                                   |         |
|-----------------------------------|---------|
| Rated voltage (V)                 | 220-240 |
| Rated frequency (Hz)              | 50      |
| Rated power input (W)             | 65,5    |
| Protection against electric shock | Class I |
| Power cord length (m)             | 1       |
| Plug type                         | No plug |

#### Accessories

|                                 |         |
|---------------------------------|---------|
| Upper Decorative Duct Extension | No      |
| White Decorative Duct           | No      |
| Black Decorative Duct           | No      |
| Island Tube Enhancer            | No      |
| Back Draught Shutter            | 2849002 |
| MAX PRO Metal Filter            | No      |
| Active Charcoal Filter          | 2846764 |
| Noiseless Flexible Duct         | No      |
| Recirculating kit               | No      |